




# Kem-Tuff™

---

CHEMICAL AIR TRANSFER SYSTEMS  
by GDS Manufacturing Co.

---

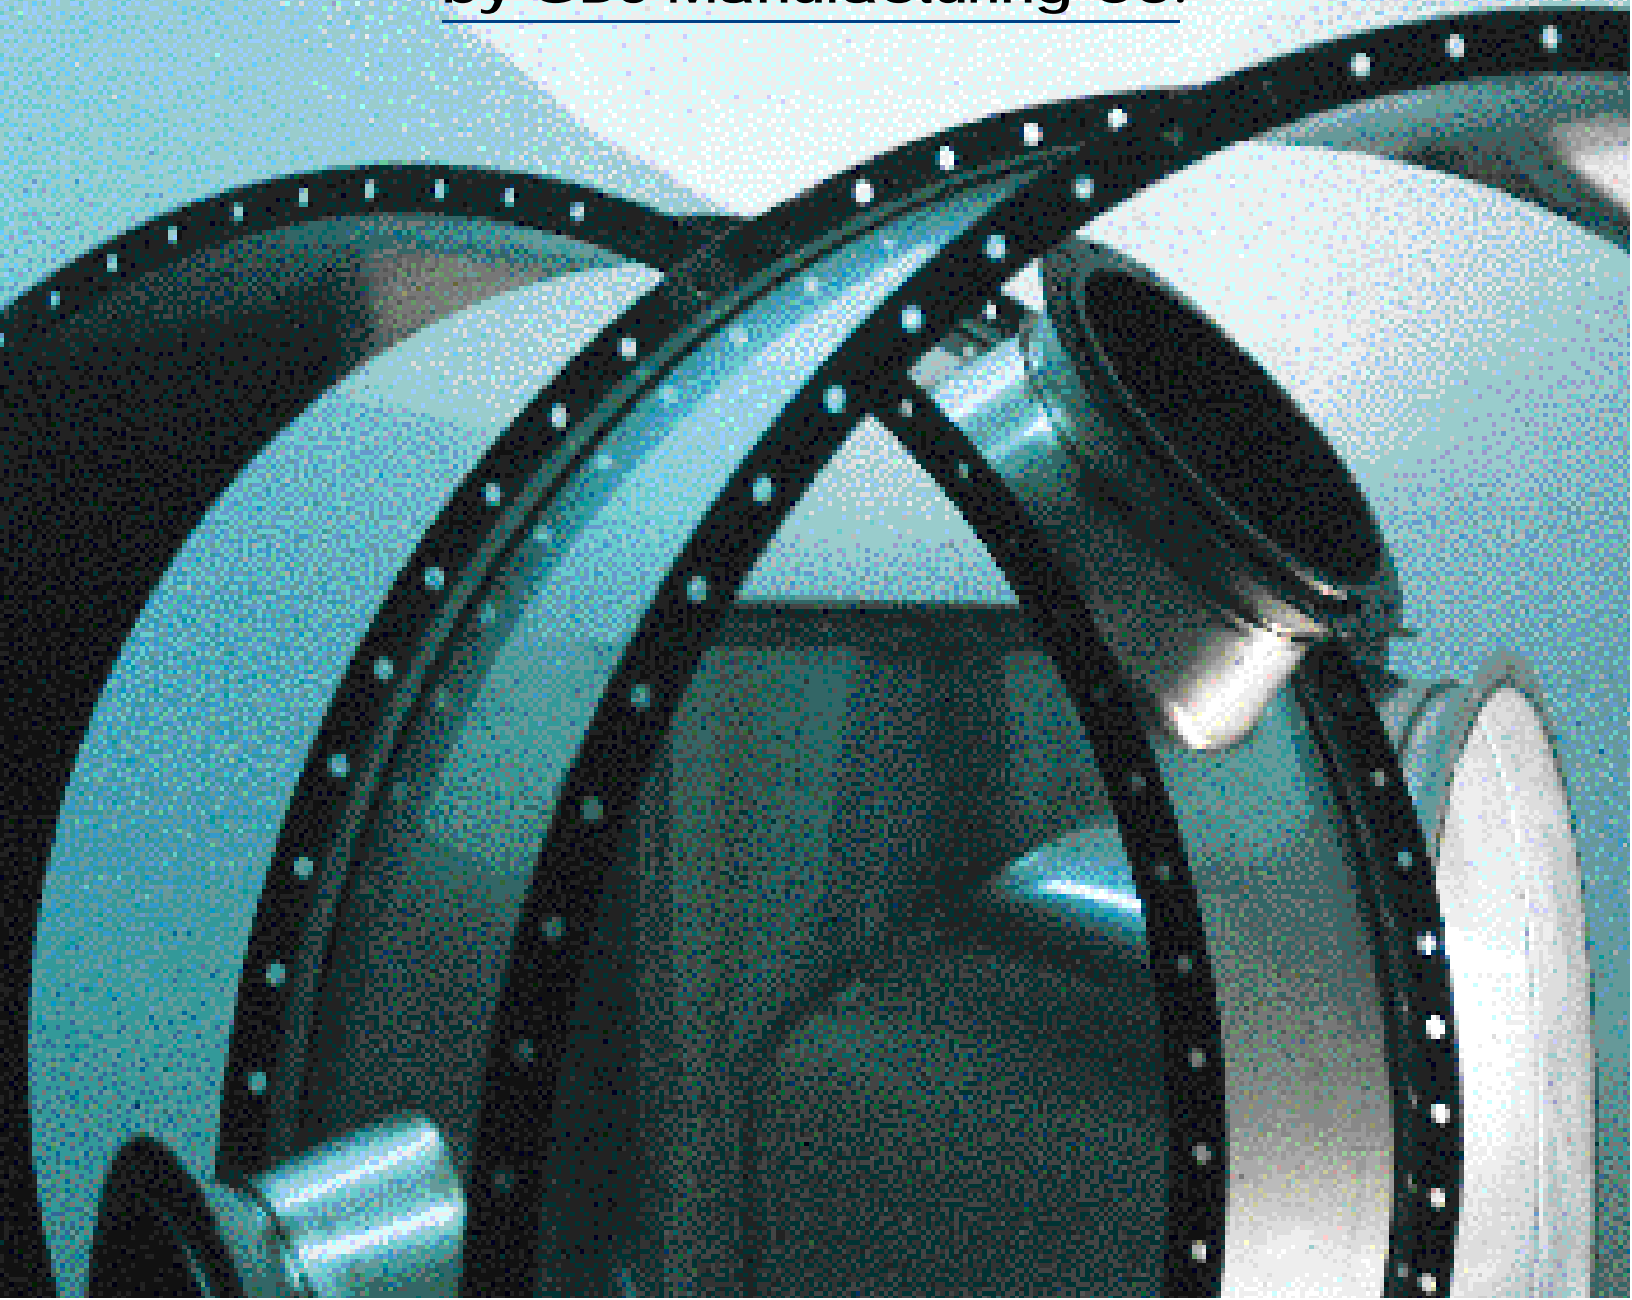



---

## **Kem-Tuff Acid Exhaust System**

### **SEMICONDUCTOR FACILITY**

This Kem-Tuff lateral is installed in a sub fab that serves as a clean air return. Tool hook-up can be performed without introducing contaminants from cutting or vapors, often encountered with polymeric exhaust systems.

---



## What is **Kem-Tuff™**?

---


Kem-Tuff is an exhaust air transfer system designed to handle a wide range of corrosive exhaust streams, found in a variety of industrial applications. By combining the toughness of stainless steel with the corrosion resistance of HALAR-ECTFE fluoropolymer, Kem-Tuff offers the user a reliable and efficient means of venting corrosive fumes and vapors from clean rooms and other processing areas. Kem-Tuff is factory mutual rated for the removal of fumes and smoke without the use of sprinklers.

Kem-Tuff is manufactured by GDS MFG. in Williston, Vermont. GDS is the sole United States manufacturer exclusively devoted to the design and production of a coated steel exhaust system. Kem-Tuff products have been installed, and have lasted longer than any other product on the market to date. At GDS our goal is to bring innovative technology and continued reliability to our customers for Kem-Tuff Chemical Air Transfer Systems.


## Why Use **Kem-Tuff™**?

---

- Kem-Tuff meets the Factory Mutual Requirements for fume and smoke removal without the use of sprinklers.
  - Kem-Tuff's fluoropolymer lining provides a wide range of chemical resistance.
  - Kem-Tuff's stainless steel substrate ensures a high level of mechanical reliability.
  - Kem-Tuff enables contamination-free installation
  - Kem-Tuff's modular design promotes cost effective handling and installation
  - Kem-Tuff is recyclable and reusable.
-



Kem-Tuff was designed to meet the increasing demands on industrial process exhaust systems.



With a focus on these demands, our engineers have designed a system that will provide users with a high level of system integrity over a long life, resulting in low cost of ownership to the user.

## The Kem-Tuff™ Advantage

---

### **Fume and Smoke Removal**

Kem-Tuff has been approved by Factory Mutual for use in smoke and fume exhaust systems without the use of sprinklers. The HALAR fluoropolymer lining is a non-flammable, low smoke coating. When tested in accordance with ASTM E-84, Kem-Tuff had a flame spread rating of 5 and a smoke density rating of 15. The use of Kem-Tuff products eliminates the expense of buying, installing and maintaining sprinkler systems.

### **Corrosion Resistance**

The HALAR-ECTFE fluoropolymer surface of Kem-Tuff provides an outstanding barrier against a wide range of chemicals. It is virtually unaffected by all corrosive chemicals commonly encountered in industry. HALAR-ECTFE is resistant to strong mineral and oxidizing acids, alkalis, metal etchants, and essentially all organic solvents except hot amines. HALAR's smooth surface characteristics make it resistant to the build-up of salts and other process by-products which can adversely affect the air handling capabilities of the system.

### **Mechanical Integrity**

Kem-Tuff's stainless steel substrate is your best defense against fire and the external environment. The exterior 316L stainless steel surface ensures your exhaust system against damage from chemical spills, water, leaks, and impact damage. Kem-Tuff's fluoropolymer lining offers excellent mechanical properties including abrasion and cut-through resistance over a wide range of temperatures from cryogenic to 300°F. Kem-Tuff's bolted flange system provides the necessary reinforcement to allow system use over a wide range of both negative and positive operating pressure.

### **Contamination-Free Handling**

A companion flange joining system makes the installation and handling of Kem-Tuff contamination-free and cost effective. With its modular component design, installing Kem-Tuff does not require any cutting, grinding, welding or use of bonding and sealing resins. It is ideal for clean work areas where particulates and fumes are undesirable.

### **Recyclable**

Kem-Tuff does not readily absorb and retain the process chemicals it handles. Decontamination is simple, safe and effective. As a result, there is no need for costly hazardous waste disposal. Kem-Tuff components can easily be recycled for use at another location.


---




# Kem-Tuff™ Design & Selection Criteria

---

Base Metal:	The base metal for all straight duct and fittings is 316L stainless steel.
Interior Coating:	HALAR-ECTFE Fluoropolymer electrostatically applied powder coating.
Angle Flange:	Van Stone Type304 Stainless Steel built in accord with SMACNA Industrial Duct Construction Standards.
Gasket Material:	Pre-cut PTFE envelope design, with neoprene filler. Also available: Gore-TEX® joint sealant.
System Classification:	Standard construction is SMACNA Class 1 Industrial Duct, for up to -6 inch WG. Kem-Tuff can be built to other design ratings upon request.
Fitting Design:	Standard fitting dimensions are per SMACNA Industrial Duct Construction Standards. Special fittings can be built to customer specification.
Adapters:	Specially designed taps and flange adapters are available to enable Kem-Tuff to be joined to existing systems.
Test Coupons:	4" x 4" Test Coupons are available for actual in-service testing.



For more detailed information on Kem-Tuff products please request any or all of these brochures:



Kem-Tuff  
Industrial Exhaust  
Ductwork  
Specification



Kem-Tuff  
Expanded Chemical  
Resistance Guide



Kem-Tuff  
Standards Guide

Kem-Tuff  
Ordering and  
Detailing Kit




Kem-Tuff  
OTS

# Kem-Tuff™ OTS™

In the event of a process upset, or worse, a tool fire, OTS will maintain its mechanical integrity and ensure that harmful and unwanted contaminants are continually exhausted from the cleanroom.

To facilitate fast, efficient and contamination-free tool hook-ups, GDS provides Kem Tuff OTS. GDS has available a large selection of straight pipe duct and fittings in sizes ranging from 4-inch through 10-inch ready for immediate shipment to your location. OTS eliminates costly delays due to long lead times and manufacturing schedules. GDSengineers have designed a fully integrated process exhaust system that allows you to make tool connections without cutting, grinding, or the use of hazardous resins and adhesives. Balancing and control are attained with either a blast-gate, or through the use of GDS's new low-leak PTFE damper assembly. For more information see the OTS Standards Guide.

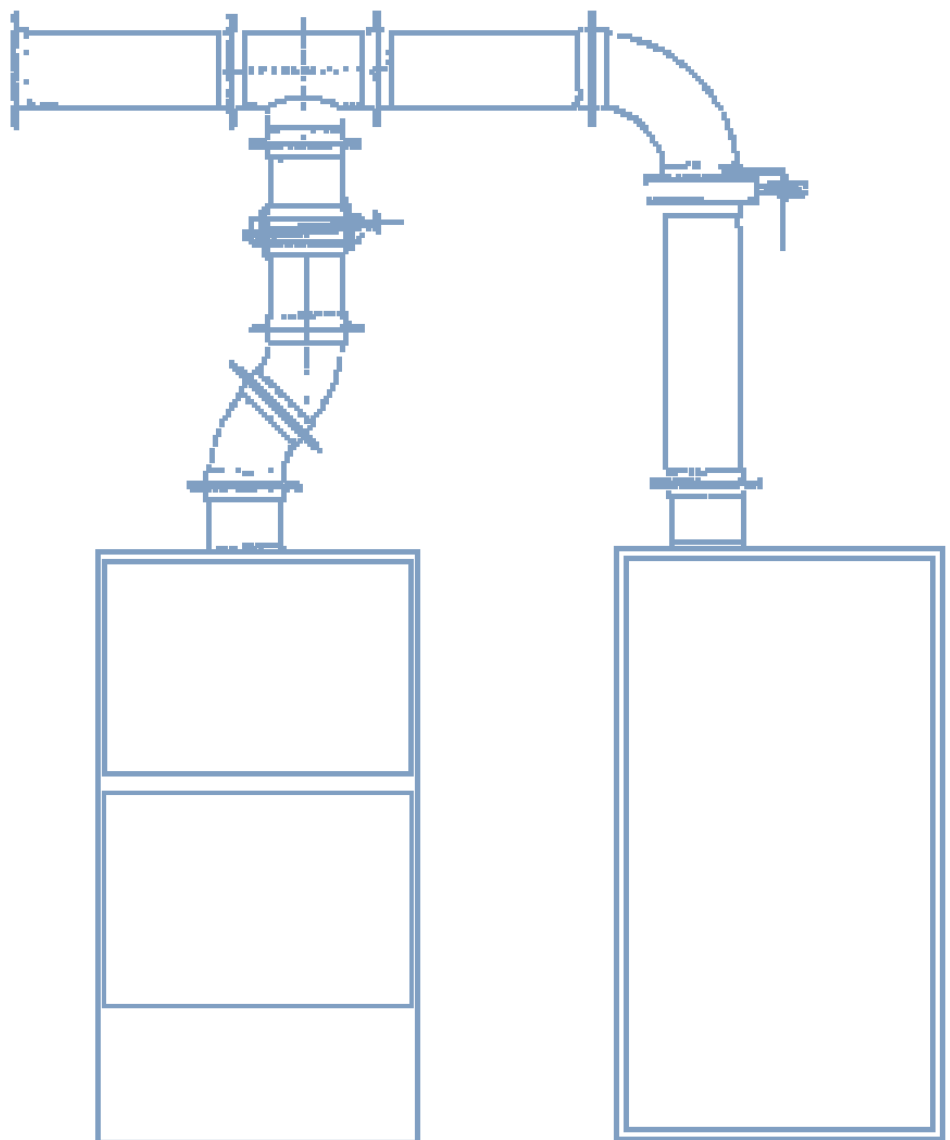

# Kem-Tuff™

## Standard Components

---

### GDS

can assist you in the design of special fittings to meet your system requirements.

Our CAD services are available to assist you in detailing your final layout, to ensure optimal fitting and joint design and placement.

For a complete list of standards and order sheets, please request the Kem-Tuff Standards and Ordering Guide.

All Kem-Tuff components are fabricated in accord with the most recent SMACNA Industrial Duct Construction Standards for Class 1 industrial duct. Kem-Tuff components are typically built to standard dimensions to promote ease of installation, and allow for future interchangeability. Straight pipe is generally fabricated in 47 inch nominal lengths. At 47 inches, the angle flanges used to join Kem-Tuff will also meet most SMACNA reinforcing requirements over a wide range of pressure classifications. All fittings are manufactured with Van Stone fittings. This list identifies our most common standard fittings.


- STRAIGHT PIPE
- 90° ELBOW 5 GORE
- 60° ELBOW 3 GORE
- 45° ELBOW 3 GORE
- 30° ELBOW 2 GORE
- 22° ELBOW 2 GORE
- WYE CONFIGURATIONS
- SQUARE TO ROUND TRANSITIONS
- 45° TAKEOFF
- CONCENTRIC TAKEOFF
- CONCENTRIC REDUCER
- ECCENTRIC REDUCER
- OFFSET
- OFFSET REDUCER
- HORIZONTAL BLASTGATE
- VERTICAL BLASTGATE
- BALANCE DAMPER
- END CAPS
- LATERAL TAKEOFF
- 90°, 180°, CROSS
- CUSTOM DESIGN

# Kem-Tuff™ Duct & Flange Dimension Guide

The chart below lists the duct gauge sizes, angle flange dimensions and bolt patterns for Class 1 industrial duct, designed to operate at pressure class -6 WG. This is a typical operating pressure found in semiconductor processing.

DUCT		ANGLE FLANGE DIMENSIONS					BOLT	
Size	Gauge	Inside Diameter	Outside Diameter	Angle Thickness	Angle Height	B.C. Dimension	Hole Size	Number
4	20	4-1/8	5-1/8	10ga.	1	5-3/8	9/32	6
6	20	6-1/8	9-1/8	3/16	1-1/2	7-3/4	9/16	6
8	20	8-1/8	11-1/8	3/16	1-1/2	9-3/4	9/16	8
10	20	11-1/8	13-1/8	3/16	1-1/2	11-3/4	9/16	8
12	20	13-1/8	15-1/8	3/16	1-1/2	13-3/4	9/16	12
14	20	15-1/8	17-1/8	3/16	1-1/2	15-3/4	9/16	12
16	20	17-1/8	20-1/8	3/16	2	18-3/8	9/16	16
18	20	19-1/8	22-1/8	3/16	2	20-3/8	9/16	16
20	20	22-1/8	24-1/8	3/16	2	22-3/8	9/16	20
22	20	24-1/8	26-1/8	3/16	2	24-3/8	9/16	20
24	20	26-1/8	28-1/8	3/16	2	26-3/8	9/16	20
26	20	28-1/4	30-1/8	3/16	2	28-3/8	9/16	24
28	20	30-1/4	32-1/4	3/16	2	30-1/2	9/16	24
30	20	32-1/4	34-1/4	3/16	2	32-1/2	9/16	28
32	20	34-1/4	36-1/4	3/16	2	34-1/2	9/16	28
34	20	36-1/4	38-1/4	3/16	2	36-1/2	9/16	32
36	20	36-1/4	40-1/4	3/16	2	38-1/2	9/16	32
38	18	38-1/4	42-1/4	3/16	2	40-1/2	9/16	36
40	18	40-1/4	44-1/4	3/16	2	42-1/2	9/16	36
42	18	42-1/4	46-1/4	3/16	2	44-1/2	9/16	40
44	18	44-1/4	48-1/4	3/16	2	46-1/2	9/16	40
46	18	46-1/4	50-1/4	3/16	2	48-1/2	9/16	44
48	18	48-1/4	52-1/4	3/16	2	50-1/2	9/16	44
50	16	50-1/4	54-1/4	3/16	2	52-1/2	9/16	48
52	16	52-1/4	56-1/4	3/16	2	54-3/8	9/16	50
54	16	54-1/4	58-1/4	3/16	2	56-3/8	9/16	50
56	16	56-1/4	60-1/4	3/16	2	58-3/8	9/16	54
58	16	58-1/4	62-1/4	3/16	2	60-3/8	9/16	56
60	16	60-1/4	64-1/4	3/16	2	62-3/8	9/16	58
70	14	70-1/4	74-1/4	3/16	2	72-3/8	9/16	68

All dimensions are in inches.

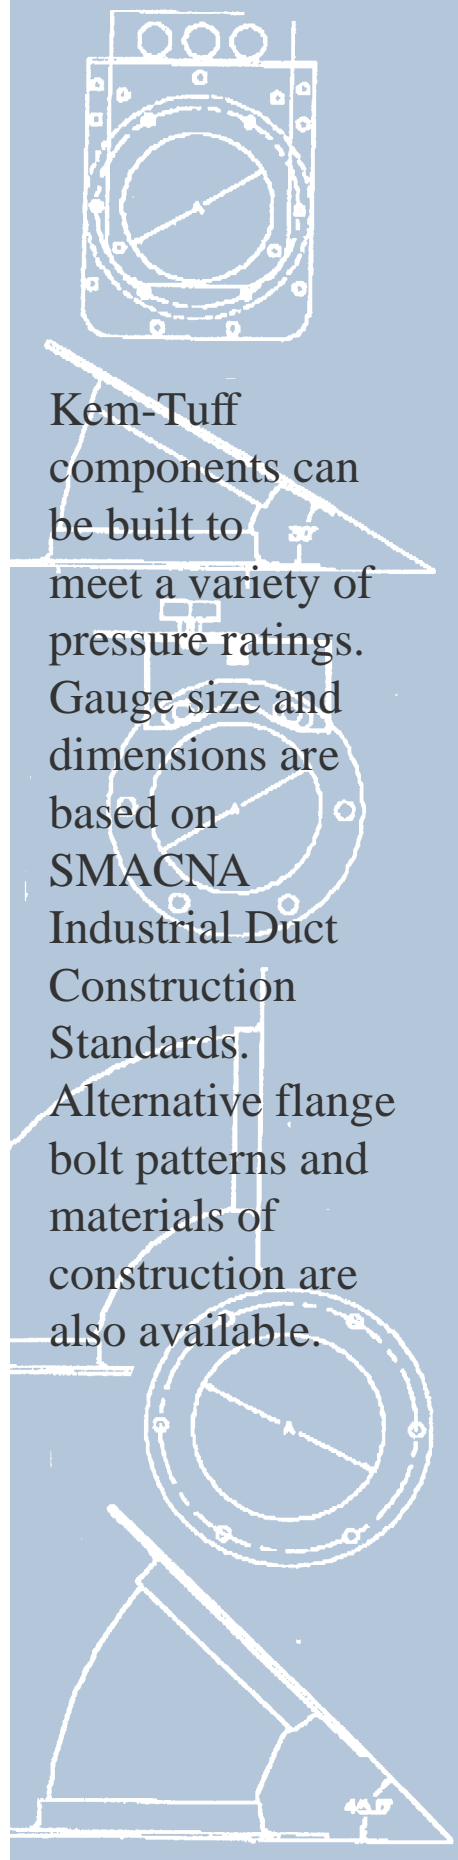

Kem-Tuff components can be built to meet a variety of pressure ratings. Gauge size and dimensions are based on SMACNA Industrial Duct Construction Standards. Alternative flange bolt patterns and materials of construction are also available.


# Kem-Tuff™ Chemical Resistance Guide

Below is a partial list of chemicals capable of corrosive or chemical attack on conventional metallic and polymeric materials of construction. A complete list of chemical compatibility can be found in the Kem-Tuff/HALAR Expanded Chemical Resistance Guide.

CHEMICAL	Maximum Use Temp		CHEMICAL	Maximum Use Temp	
	Deg.F	Deg. C		Deg.F	Deg. C
Acetic Acid 90%	300	149	Hypochlorous Acid	300	149
Acetic Acid Glacial	212	100	Magnesium Hydroxide	300	149
Acetone	121	50	MEK	121	50
Alcohol, Butyl	300	149	MIBK	121	50
Alcohol, Ethyl	300	149	Nitric Acid 50%	212	100
Alcohol, Isopropyl	300	149	Nitric Acid 70%	121	50
Aluminum Chloride	300	149	N-MP	73	23
Aluminum Hydroxide	300	149	Ozone	212	100
Ammonia, Gas	212	100	Phosphoric Acid 30%	300	149
Ammonium Chloride	300	149	Phosphoric Acid 85%	300	149
Ammonium Fluoride	300	149	Plating Solutions, Brass	212	100
Ammonium Hydroxide	300	149	Plating Solutions, Chrome	212	100
Ammonium Phosphate	300	149	Plating Solutions, Copper	212	100
Ammonium Sulfate	300	149	Plating Solutions, Gold	212	100
Chlorine Dioxide	212	100	Plating Solutions, Nickel	212	100
Chlorine Gas, Dry	212	100	Plating Solutions, Silver	212	100
Chlorine Gas, Wet	212	100	Plating Solutions, Tin	212	100
Chlorobenzene	121	50	Plating Solutions, Zinc	212	100
Chlorosulfonic Acid	121	50	Potassium Hydroxide 50%	300	149
Chromic Acid 50%	212	100	Sodium Bisulfite	300	149
Coke Oven Gas	212	100	Sodium Chloride	300	149
Dilisobutyl Ketone	121	50	Sodium Fluoride	300	149
Dimethyl Formamide	212	100	Sodium Hydroxide 50%	250	120
Dimethyl Sulfoxide	212	100	Sulfur Dioxide	212	100
Ferric Chloride	300	149	Sulfuric Acid 50%	250	120
Freon F-22	212	100	Sulfuric Acid 93%	250	120
Freon F-113	212	100	Sulfuric Acid 98%	250	120
Hydrobromic Acid 50%	300	149	Trichloroacetic Acid	121	50
Hydrochloric Acid 37%	300	149	Urea	212	100
Hydrofluoric Acid 10%	300	149	Water Deionized	300	149
Hydrofluoric Acid 49%	250	120	Zinc Chloride	300	149
Hydrogen Peroxide 50%	250	120	Zinc Sulfate	300	149
Hydrogen Peroxide 90%	121	50			

The information contained in this table is based on laboratory testing, field experience and technical estimation, and should only be used as a guide. Actual environmental testing should be conducted before determining final suitability.



In the construction of Kem-Tuff Components, HALAR-ECTFE serves as the protective layer against corrosive attack. HALAR-ECTFE fluoropolymer provides outstanding chemical resistance and barrier properties. It is virtually unaffected by all corrosive chemicals commonly encountered in industry.

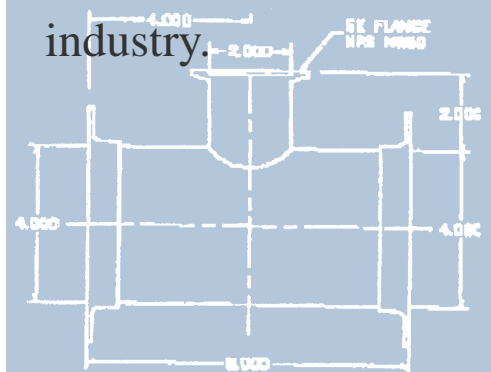

## DESIGNED FOR USE IN:

- Bleaching Facilities
- Chemical Processing
- Clean Rooms
- Etching Lines
- Food Processing Plants
- Hospitals
- Laboratories
- Municipal Water & Sewage Facilities
- Metal Processing & Refining Operations
- Pharmaceutical Plants
- Plating & Pickling Operations
- Printed Circuit Board Manufacturing
- Pulp & Paper Processing
- Semiconductor Processing
- Any Application where Corrosive Exhaust is Generated

## Kem-Tuff™ Chemical Air Transfer Systems

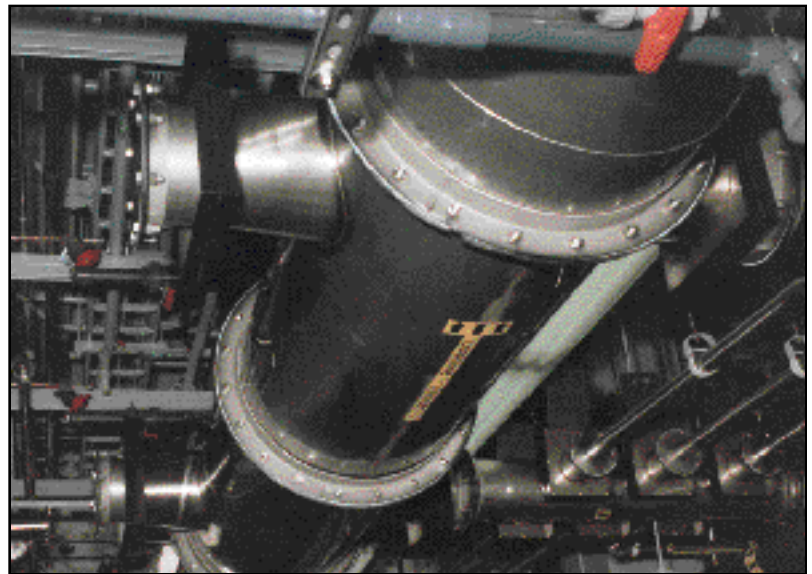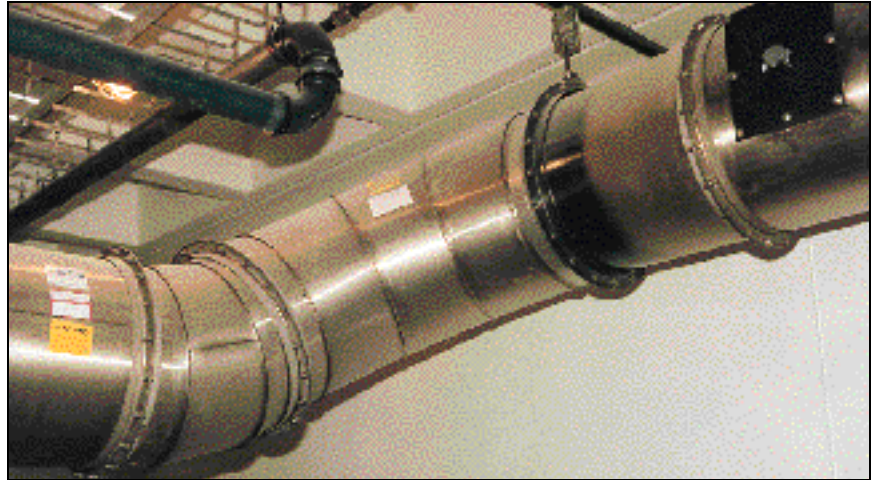

# KemTuff™

## Chemical Air Transfer Systems

Manufactured by:

GDS Manufacturing  
2 Chad Lane  
Williston, VT 05495  
Phone: 802-862-7610  
Fax: 802-862-7601

GDS Manufacturing  
571 Moon Clinton Road  
Moon Township, PA 15108  
Phone: 800-899-7610  
Fax: 412 264-6735

---

All statements, information, and data given herein are believed to be accurate and reliable but are presented without guaranty, warranty or responsibility of any kind, express or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use will provide the same results. The user should not assume that all safety measures are indicated, or that other measures may not be required.

---