ORDER SHEET

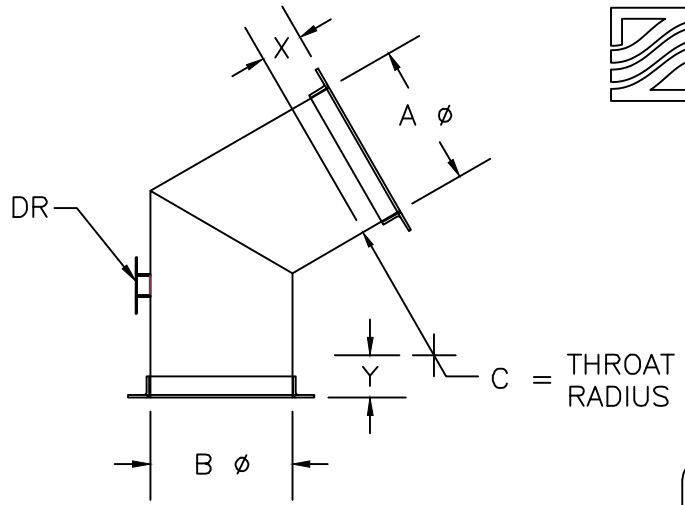

Kem-Tuff™
CORROSIDE AIR TRANSFER SYSTEMS

NOTE* When ordering, refer to EL60 2 Gore STANDARDS sheet

60° Elbow - 2 Gore

EL60

						CONNECTIONS* REFER TO LEGEND								
						STANDARD*		USE FOR NON-STANDARD FLANGES ONLY						
FITTING #	A ø	B ø	C	X	Y	"A"	"B"	SPEC	I.D.	O.D.	B.C.	HOLE SIZE	# OF HOLES	
								"A"						
								"B"						
								"A"						
								"B"						
								"A"						
								"B"						
								"A"						
								"B"						

Pressure Class in w.g.	+	–	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

Company Name: _____

Contact Name: _____ Phone#: _____

Project Name: _____ Date: _____

Project #: _____ GDS Project #: _____

STANDARD ELBOWS SHALL HAVE A MINIMUM CENTELINE RADIUS 1-1/2 TIMES THE DUCT DIAMETER WHENEVER POSSIBLE.
HALF-RADIUS ELBOWS AVAILABLE UPON REQUEST.

CONNECTION LEGEND

TYPE	MATERIAL
KF = NW-ISO-KF FB = FLAT BAR AR = ANGLE RING RAW = NO FLANGE	BI = BLACK IRON 304 = STAINLESS SPEC = FB 304 S.S. ONLY

REV. 09/15/25 FILE NAME: KT-EL602-ORSH