


Kem-Tuff™
CORROSIVE AIR TRANSFER SYSTEMS

**Kem-Seel
Gasket**

- GSK

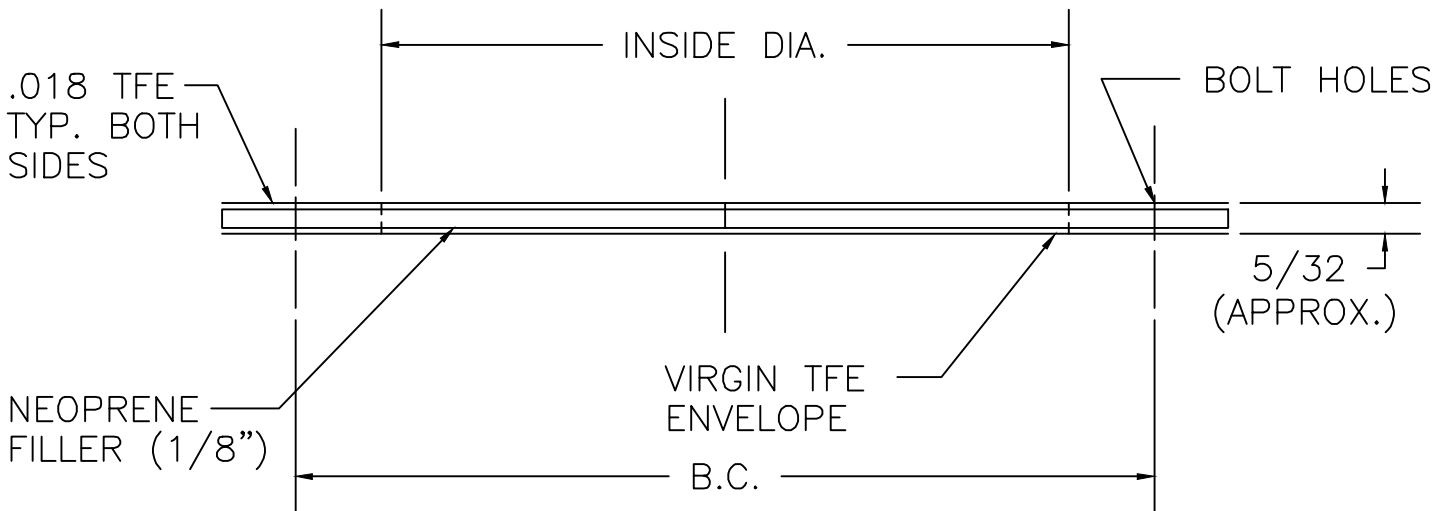

SEE RING DRAWING (AR)
FOR HOLE SIZES, QUANTITY
AND LOCATION

PRODUCT DATA SHEET

NEOPRENE FILLER

Durometer: 50, 60, 70 - ± Shore A

Tensile strength: 1000 lb./in. (minimum)

Ultimate Elongation, (%): 300%


Specific Gravity: 1.40

Meets MIL-R-3065 Grade SC609

6855 CLASS 2

TYPE OF Kem-Seel

- "V" CUT
 "U" CUT
 FORM SHIELD

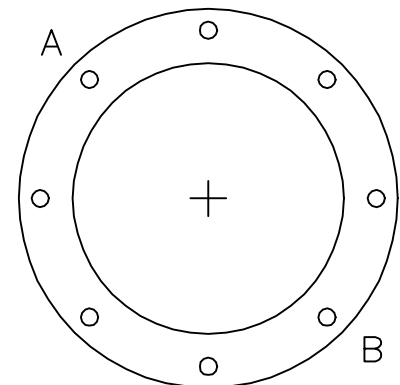

Front View Example

TORQUE SPEC.

1ST TIME THROUGH TIGHTEN TO 30 FT/LBS.

2ND TIME THROUGH TIGHTEN TO 25 FT/LBS.

TIGHTEN IN A CROSS PATTERN (AS SHOWN IN FRONT VIEW) A TO B

GASKET THICKNESS IS .1544 WHEN COMPRESSED