




Kem-Tuff™
CORROSIVE AIR TRANSFER SYSTEMS

NOTE* When ordering, refer to QLAT 45 STANDARDS sheet

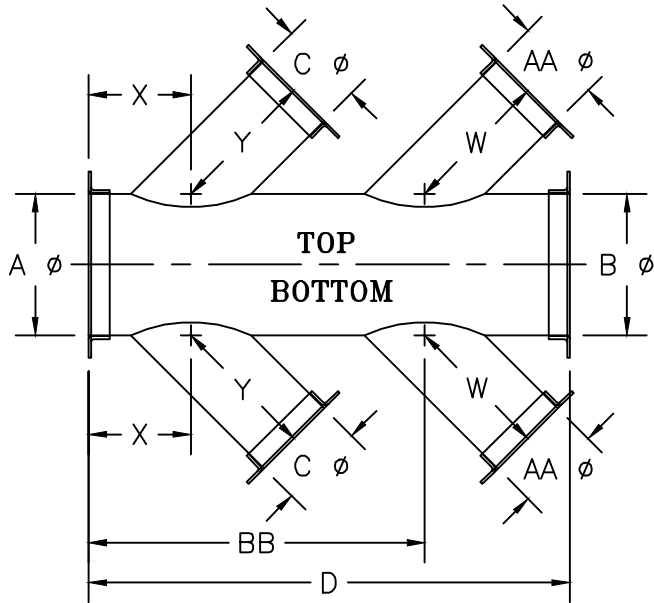

Quadruple Lateral Takeoff - QLAT 45

FITTING #	A ϕ	B ϕ	AA ϕ	BB	C ϕ	D	W	X	Y	CONNECTIONS* REFER TO LEGEND				SPEC	I.D.	O.D.	B.C.	HOLE SIZE	# OF HOLES	REMARKS
										"A"	"B"	"AA"	"C"							
														"A"						
														"B"						
														"AA"						
														"C"						
TOP														"A"						
BOTTOM														"AA"						
														"C"						

Pressure Class in w.g.	+	-	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
------------------------	---	---	---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----

Company Name: _____
 Contact Name: _____ Phone#: _____
 Project Name: _____ Date: _____
 Project #: _____ GDS Project #: _____

CONNECTION LEGEND	
TYPE	MATERIAL
KF = NW-ISO-KF	BI = BLACK IRON
FB = FLAT BAR	304 = STAINLESS
AR = ANGLE RING	SPEC = FB 304 S.S. ONLY
RAW = NO FLANGE	

STANDARD ELBOWS SHALL HAVE A MINIMUM CENTELINE RADIUS 1-1/2 TIMES THE DUCT DIAMETER WHENEVER POSSIBLE. HALF-RADIUS ELBOWS AVAILABLE UPON REQUEST.